

ENVIRONMENTAL PRODUCT DECLARATION

CEM II/B-P 42.5 R

In accordance with: ISO 14025:2006, EN
15804:2012+A2:2019/AC:2021

Products included in the EPD:

CEM II/B-P 42.5 R

An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com

EPD of a single product from a manufacturer/service provider

EPD Owner
TITAN Usje AD Skopje

Programme
International EPD System
www.environdec.com

Programme operator
EPD International AB

Registration number
EPD-IES-0029412:001

Version date
2026-06-24

Validity date
2031-06-23



GENERAL INFORMATION

Programme information

| | |
|-----------|---|
| Programme | International EPD System |
| Address | EPD International AB Box 210 60 SE-100 31 Stockholm Sweden |
| Website | www.environdec.com |
| E-mail | support@environdec.com |

Product category rules

| | |
|---|--|
| CEN standard EN 15804 serves as the Core Product Category Rules (PCR) | |
| Product Category Rules (PCR) | 2019:14 Construction products (EN 15804+A2) (version 2.0.1) 2.0.1 |
| PCR review was conducted by | The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Rob Rouwette (chair), Noa Meron (co-chair). The review panel may be contacted via the Secretariat www.environdec.com/support . |
| Complementary Product Category Rules (c-PCR) | PCR 2019:14-c-PCR-001 Being updated - Cement and building lime (EN 16908) (c-PCR to PCR 2019:14) (1.0.0) |
| c-PCR review was conducted by | The Technical Committee of the International EPD System |

Verification

| | |
|--|--|
| Independent third-party verification of the declaration and data, according to ISO 14025:2006, via | <input checked="" type="checkbox"/> EPD verification through an individual EPD verification <input type="checkbox"/> EPD verification through EPD Process Certification* <input type="checkbox"/> EPD verification through a fully pre-verified tool |
| Third-party verifier | EUROCERT S.A. |
| Accredited by | Hellenic Accreditation System ESYD |
| Accredited certification body address | Greece |
| Procedure for follow-up of data during EPD validity involves third party verifier | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| <p>*EPD Process Certification involves an accredited certification body certifying and periodically auditing the EPD process and conducting external and independent verification of EPDs that are regularly published. More information can be found in the General Programme Instructions on www.environdec.com.</p> | |

Ownership and limitations on use of EPD

Limitations

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

Ownership

The EPD Owner has the sole ownership, liability, and responsibility for the EPD.

INFORMATION ABOUT EPD OWNER

| | |
|-----------------------|---|
| EPD Owner | TITAN Usje AD Skopje |
| Contact person name | Natasha Bakreska, Ph.D. Environmental and Alternative Fuels Manager |
| Contact person e-mail | natasab@usje.mk |
| Organisation address | Bul. Boris Trajkovski br.94 1000 Skopje North Macedonia |
| LCA Practitioner | Frosina Dimoska, FrosinaD@usje.mk |

Description of the organisation of the EPD Owner

Building materials manufacturer





PRODUCT INFORMATION

| | |
|--|---|
| Product name | CEM II/B-P 42.5 R |
| Product identification | Compressive Strength 28 days (MPa): $\geq 42,5$ R |
| Product description | <p>In line with our commitment to continuous improvement in the field of environmental protection and sustainable development by improving energy efficiency, we have developed CEM II/B-P 42,5 R. In addition to the strength class of 42.5 MPa, the cement belongs to the class with high early strengths (R). This cement type is a suitable replacement for the cement CEM II/B-V 42.5 R. The presence of natural pozzolan (P) has a positive effect in reaching early and final strengths due to the pronounced pozzolanic activity. This eco-cement simultaneously has a positive effect on the global CO₂ emission by reducing the clinker content. Our cements comply with the MKC EN 197-1 harmonized European standard and are subject to assessment and performance verification procedures by a third party (an EU authorized body under System 1+ for assessment and verification of consistency of performance). The CE mark is affixed to the packaging and to the shipping documents in accordance with the Construction Products Regulation.</p> |
| Technical purpose of product | <p>This cement is widely used in the construction of standard structures for any purpose (infrastructure, industry, housing, etc.), both for reinforced concrete and mass concrete structures. Ready-mix concrete plants are the largest users of this cement for concrete strength grades up to C40/50. Its balanced properties (hardness, setting time, heat during hydration) make this cement applicable in all climates and aggressive exposure classes. All standard concrete additives (retarders, plasticizers, etc.) can be used with our CEM II/B-P 42,5 R.</p> |
| Manufacturing or service provision description | <p>Cement Production Clinker, along with limestone, gypsum, fly ash, and pozzolana, is used to produce cement according to specific recipes. The process is monitored by mill operators and process control software. Clinker is stored in a silo, with three adjacent bunkers holding limestone (or clinker), gypsum, and tuff. Fly ash is stored in separate silos. Materials are fed into the cement mill either manually or automatically via weigh feeders. Milling produces cement, which is transferred by elevator to a classifier. Fine particles proceed to storage silos via air slides and another elevator, while coarse particles return to the mill. De-dusted exhaust gases are released into the atmosphere, and collected dust is returned to the process. Chemical additives are introduced to enhance grinding efficiency and product quality.</p> <p>Cement Packaging and Dispatch Finished cement is stored in silos, ready for dispatch either in bulk or in paper bags. For bagged cement, empty paper bags are loaded into the packing machine, which fills them with cement and "Usjema" automatically. Each bag is weighed, and any bag not meeting the weight standard is rejected, torn, and the cement recycled back into the machine. Filled bags are cleaned using pressurized air, transported via belt conveyors to the palletizer, then to the stretching machine. Damaged bags are removed and replaced before loading.</p> |
| Material properties | Volumetric mass density: 2960 kg/m ³ |
| Manufacturing site | TITAN Usje Bul. Boris Trajkovski br.94 1000 Skopje, Kisela Voda North Macedonia |

| | |
|-----------------------|--|
| UN CPC code | 3744. Portland cement, aluminous cement, slag cement and similar hydraulic cements, except in the form of clinkers |
| Geographical scope(s) | Global |

PRODUCT IMAGES



CONTENT DECLARATION

| | |
|--------------------------------|--|
| Hazardous and toxic substances | The product does not contain any substances from the SVHC candidate list in concentrations exceeding 0.1% of its weight. |
|--------------------------------|--|

| PRODUCT CONTENT | | | | |
|-----------------|---|--|--------------------------------------|---|
| Content name | Mass, kg | Post-consumer recycled material, mass-% of product | Biogenic material, mass-% of product | Biogenic material ¹ , kg C/declared unit |
| Clinker content | 750 | 0 | 0 | 0 |
| Other materials | 250 | 0 | 0 | 0 |
| Total | 1000 | 0 | 0 | 0 |
| Note 1 | 1 kg biogenic carbon is equivalent to 44/12 kg of CO ₂ | | | |

| PACKAGING MATERIALS | | | |
|---------------------|---|-----------------------------|---|
| Material name | Mass, kg | Mass-% (versus the product) | Biogenic material ¹ , kg C/declared unit |
| Paper bag | 0.0867 | 0.003 | |
| Wooden pallet | 0.2806 | 0.011 | |
| Stretch foil | 0.0069 | 0 | |
| Cover foil | 0.0024 | 0 | |
| Cover | 0.0008 | 0 | |
| Total | 0.3774 | 0.014 | 0 |
| Note 1 | 1 kg biogenic carbon is equivalent to 44/12 kg of CO ₂ | | |

LCA INFORMATION

| | |
|---|---|
| EPD based on declared or functional unit | Declared unit |
| Declared unit and reference flow | CEM II/B-P 42.5 R Mass: 1000 kg |
| Conversion factor to mass | 1 |
| Are infrastructure or capital goods included in any upstream, core or downstream processes? | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Data sources used for this EPD | ecoinvent database (general) ecoinvent 3.5 database Other database GCCA Industry EPD Tool for Cement and Concrete and Ecoinvent database (v5.2) |
| LCA Software | GCCA Industry EPD Tool v5.2 |
| Additional information about the underlying LCA-based information | <p>Cut-off rules: Cut-off criteria were employed to include all the environmental impact sources while ensuring the study to be complete, relevant, accurate and consistent. Cut-off criteria considered for this study are below:</p> <ul style="list-style-type: none"> • Mass – For mass flow less than 0.5% of the total mass flow environmental impact source may be eliminated with the stipulation that impact would be marginal. • Energy – For energy flow less than 0.5% of the total energy flow environmental impact source may be eliminated under that condition that environmental impact is not a concern. • Environment – For those flows (mass or energy flow) less than 0.5% of the total respective flow with significant environmental concern impact source must be included for the study. <p>Allocation: The allocation has been avoided where that was possible. Production was split into two sub-processes, clinker and cement, and the associated input and output data for each sub-process were recorded. When data could not be directly attributed to a specific product, they were assigned physical properties (mass). No by-products occur during clinker and cement production; therefore, there is no need for allocations in by-products. For water (consumed and recycled), waste and emissions allocation, the “clinker to cement ratio” was used for allocating the volumes to clinker or cement respectively. Since the rule pertaining to allocation applies only when there are two or more by-products produced from a single stream, the allocation rule was not considered in this study, as the operation in TITAN Usje cement production Plant resulted in no more than one product from each stream.</p> <p>Assumptions and approximations: The cradle to gate study approach was adopted. In this study, an assumption was made on the data for the specific usage of solar electrical energy produced on site. The rest of the data considered for this study was obtained from primary sources. Another assumption was made for road and sea transportation. A >32 metric ton lorry, EURO6 and bulk carrier for dry goods were used respectively. The cement recipe (materials percentage participation) was defined by the pre-verified and automated ERP system (SAP) that the company uses. An approximation was made when calculating the packaging waste, as the data was taken from a packaging normative created to describe the packaging of all the products individually.</p> |
| Version of the EN 15804 reference package | EF Reference Package 3.1 |

| | |
|---|---|
| Characterisation methods | LCI results are classified into impact categories, each with a category indicator (ISO 14044:2006). In the present study, the environmental indicators (impact categories) are reported according to the PCR 2019:14 "Construction products", c-PCR-001 "Cement and building lime (EN 16908:2017)" and EN 15804:2012+A2/AC:2021. |
| Technology description including background system | The product considered is Portland cement according to MKC EN 197. The product consists of Portland cement clinker, limestone, gypsum and natural pozzolana. The raw materials (other than clinker) content is between 20 and 30 % (mass). |
| Scrap (recycled material) inputs contribution level | Less than 10% of the GWP-GHG results in modules A1-A3 come from scrap inputs |

Data quality assessment

| | |
|--|---|
| Description of data quality assessment and reference years | <p>In terms of data collection and quality requirements ISO 14044 was applied. The data concerning the modules A1 (raw material supply), A2 (transportation) and A3 (product manufacturing) were provided by Titan Usje and involved all input and output materials to the plant, the consumed utilities (energy, water) and the distances and means of transport for each input stream. Regarding the electricity mix, the default values in GCCA's Industry EPD Tool for Cement and Concrete LCA database (v 4.2) were used. This web-based tool, developed by the Global Cement and Concrete Association, is a calculation tool for EPDs of clinker, cement, concrete, and precast elements.</p> <p>The GCCA EPD tool is developed by Quantis https://quantis-intl.com/ and verified by Studio Fieschi http://www.studiofieschi.it/en. The International EPD® System, which provides the framework to develop and publish EPDs based on ISO 14025 and EN 15804, gives the final approval of the tool's compliance with the rules.</p> <p>As a part of the study, data authentication was carried out to understand the assurance level provided by the collected data. This authentication process enabled TITAN Usje to avoid any ambiguities that may encircle in the future.</p> <p>The GCCA EPD Tool database was used for the missing data. Generic data used in this study relate to:</p> <ul style="list-style-type: none"> - CO2 emission factors for different transportation ways - Specific emission factor of used energy mix (kg CO2/kWh) <p>The required data were sourced from several reliable sources:</p> <ul style="list-style-type: none"> - The company's ERP system (SAP), - Flow meters monitoring water consumption and recycling, - Continuously recorded emissions data obtained from monitoring systems installed at each cement plant (MEAC). The monitored emissions include Dust, NOx and SO2. <p>Reference period: January - May 2025</p> |
|--|---|

ELECTRICITY USED IN THE MANUFACTURING PROCESS IN A3 (A5 FOR SERVICES)

| | | |
|-------------------------|--|-------|
| Type of electricity mix | Specific electricity mix as generated, or purchased from an electricity supplier, demonstrated by a contractual instrument | |
| Energy sources | Hydro | 14.8% |
| | Wind | 9.3% |
| | Solar | 3% |

| | | |
|---------------------------|---------------------------------|-------|
| | Biomass | 4% |
| | Geothermal | 0.4% |
| | Waste | 1.2% |
| | Nuclear | 22.5% |
| | Natural gas | 20.9% |
| | Coal | 22.3% |
| | Oil | 1.6% |
| | Peat | 0% |
| | Other | 0% |
| Climate impact (GWP-GHG): | 0.95 kg CO ₂ eq./kWh | |

| CO ₂ UPTAKE ASSOCIATED WITH CARBONATION AND ITS ASSUMPTIONS | | |
|--|--------------------------------------|----------|
| | Production stage (module A) | Excluded |
| | Use stage (module B) | Excluded |
| | End-of-Life stage (module C) | Excluded |
| | Beyond product life cycle (Module D) | Excluded |

SYSTEM BOUNDARY


| | |
|---------------------------------------|--|
| Description of the System boundary | a) Cradle to gate with modules C1-C4 and module D (A1-A3 + C + D). |
| Excluded modules | Yes, there is an excluded module, or there are excluded modules |
| Justification for omission of modules | The scope of this study is "Cradle to gate" covering the product stage (modules A1-A3), since the product fulfils the three conditions required by EN 15804:2012+A2:2019, about the exclusion of modules C1-C4 and D. The EPD covers the product stage ("cradle to gate", A1-A3), since the three criteria of EN 15804 are met for the exclusion of stages B1-B7, C1-C4 and D. Modules C1-C4 and D are not included in this EPD, and the environmental impacts of the end-of-life stage are therefore not covered. |

| | Product stage | | | Construction process stage | | Use stage | | | | | | | End of life stage | | | | Beyond product life cycle |
|------------------------|--|-----------|-----------------------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|------------------------------------|
| | Raw material supply | Transport | Manufacturing | Transport to site | Construction installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential |
| Module | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Modules declared | X | X | X | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Geography | Global | Global | Republic of North Macedonia | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Share of specific data | 100% | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation - products | | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation - sites | | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Disclaimer | The share of specific/primary data and both variations (products and sites) refer to GWP-GHG results only. | | | | | | | | | | | | | | | | |

Description of the process flow diagram(s)

Process flow diagram of the product system, divided into the life-cycle stages and modules (or other division of the product life cycle, if defined in the PCR), showing the main processes included and the system boundary of the LCA. The diagram shall make it clear when the end-of-waste state is reached for main input flows of reused/recycled materials and recovered energy, and for output flows of reused/recycled materials and recovered energy exiting the end-of-life stage.

Process flow diagram(s) related images

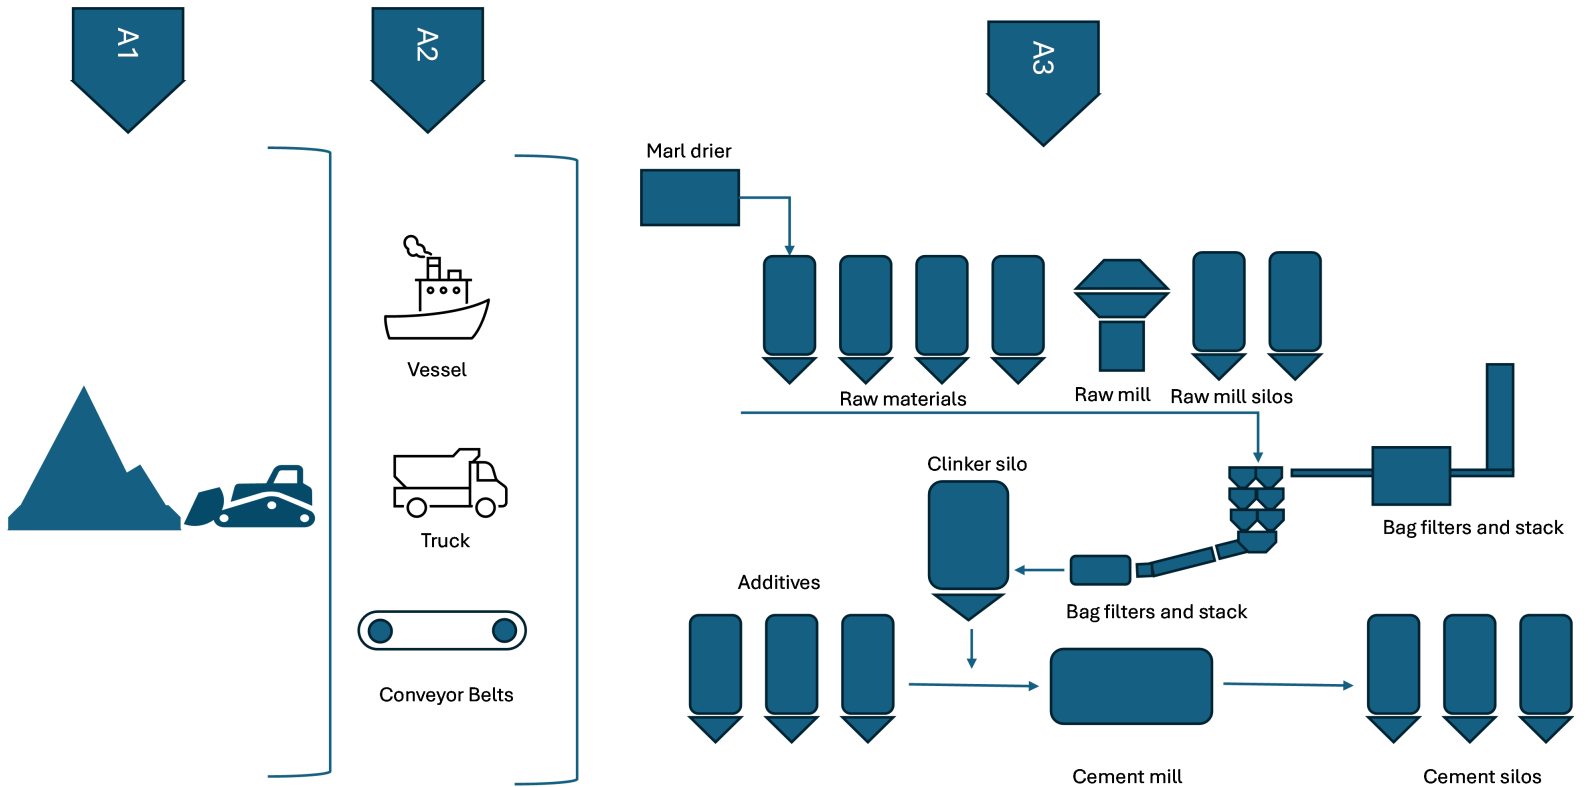

DEFAULT SCENARIO

| | |
|-------------------------------------|--|
| Name of the default scenario | The LCI results for CEM II/B-P 42.5 R for the reference period |
| Description of the default scenario | The LCI results (calculated by GCCA EPD tool) are presented as environmental indicators according to the EN 15804. |

ADDITIONAL SCENARIO 1

| | |
|--|--|
| Name of the additional scenario | Substitution of natural pozzolana with dry fly ash |
| Description of the additional scenario | Substituting the natural pozzolana with dry fly ash (producing CEM II/B-V 42,5 R instead of CEM II/B-P 42,5R) decreases the emissions by 11 kg CO ₂ eq. |

ADDITIONAL SCENARIO 2

| | |
|--|---|
| Name of the additional scenario | 50% increase in solar energy input in the energy mix for the production of cement |
| Description of the additional scenario | CEM II/B-P 42.5 R- increasing the share of solar energy in the electricity mix by 50% decreases the emitted CO ₂ eq by 0.343 kg. |

ADDITIONAL SCENARIO 3

| | |
|--|---|
| Name of the additional scenario | 4% decrease in clinker and a corresponding increase in pozzolan, limestone and gypsum |
| Description of the additional scenario | By decreasing the clinker content in CEM II/B-P 42.5 R by 4%, the emissions decrease by 55.1 kg CO ₂ eq., or by 6 %. |

ENVIRONMENTAL PERFORMANCE

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Mandatory environmental performance indicators according to EN 15804

| Impact category | Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--|---|-----------------------------------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Climate change - total | GWP-total | kg CO ₂ eq. | 9.93E+2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Climate change - fossil | GWP-fossil | kg CO ₂ eq. | 9.92E+2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Climate change - biogenic | GWP-biogenic | kg CO ₂ eq. | 6.89E-1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Climate change - land use and land-use change | GWP-luluc | kg CO ₂ eq. | 1.33E-1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Ozone depletion | ODP | kg CFC-11 eq. | 7.02E-6 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acidification | AP | mol H ⁺ eq. | 2.51E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Eutrophication aquatic freshwater | EP-freshwater | kg P eq. | 6.43E-2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Eutrophication aquatic marine | EP-marine | kg N eq. | 3.35E-1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Eutrophication terrestrial | EP-terrestrial | mol N eq. | 8.19E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Photochemical ozone formation | POCP | kg NMVOC eq. | 2.64E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Depletion of abiotic resources - minerals and metals | ADP-minerals&metals ¹ | kg Sb eq. | 2.97E-3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Depletion of abiotic resources - fossil fuels | ADP-fossil ¹ | MJ, net calorific value | 6.96E+3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Water use | WDP ¹ | m ³ world eq. deprived | 5.66E+1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | | | | | | | | | |
| Disclaimer 1 | The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator | | | | | | | | | | | | | | | | |

Additional mandatory environmental performance indicators

| Impact category | Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------|--|------------------------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Climate change - GWP-GHG | GWP-GHG ¹ | kg CO ₂ eq. | 9.93E+2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acronyms | GWP-GHG = Global warming potential greenhouse gas. | | | | | | | | | | | | | | | | |
| Disclaimer 1 | The GWP-GHG indicator is termed GWP-IOBC/GHG in the ILCD+EPD+ data format. The indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO ₂ is set to zero. | | | | | | | | | | | | | | | | |

Additional voluntary environmental performance indicators according to EN 15804

| Impact category | Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|---------------------------------------|---|-------------------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Particulate matter emissions | PM | Disease incidence | 3.35E-5 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Ionizing radiation - human health | IRP ¹ | kBq U235 eq. | 1.35E+1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Eco-toxicity - freshwater | ETP-fw ² | CTUe | 1.40E+3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Human toxicity - cancer effects | HTP-c ² | CTUh | 2.01E-6 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Human toxicity - non-cancer effects | HTP-nc ² | CTUh | 4.11E-5 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Land-use related impacts/soil quality | SQP ² | Dimensionless | 4.93E+3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acronyms | PM = Potential incidence of disease due to particulate matter emissions; IRP = Potential human exposure efficiency relative to U235; ETP-fw = Potential comparative toxic unit for ecosystems; HTP-c = Potential comparative toxic unit for humans; HTP-nc = Potential comparative toxic unit for humans; SQP = Potential soil quality index. | | | | | | | | | | | | | | | | |
| Disclaimer 1 | This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator. | | | | | | | | | | | | | | | | |
| Disclaimer 2 | The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator. | | | | | | | | | | | | | | | | |

Resource use indicators according to EN 15804

| Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|-----------|--|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| PERE | MJ, net calorific value | 3.16E+2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| PERM | MJ, net calorific value | 3.03E+2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| PERT | MJ, net calorific value | 6.18E+2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| PENRE | MJ, net calorific value | 6.94E+3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| PENRM | MJ, net calorific value | 1.63E+1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| PENRT | MJ, net calorific value | 6.96E+3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| SM | kg | 4.07E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| RSF | MJ, net calorific value | 3.66E+1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| NRSF | MJ, net calorific value | 3.36E+1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| FW | m ³ | 2.81E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water. | | | | | | | | | | | | | | | |

Waste indicators according to EN 15804

| Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|-----------|--|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| HWD | kg | 6.93E-3 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| NHWD | kg | 8.31E-2 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| RWD | kg | 2.41E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acronyms | HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed. | | | | | | | | | | | | | | | |

Output flow indicators according to EN 15804

| Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|-----------|---|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| CRU | kg | 0.00E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| MFR | kg | 4.57E-1 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| MER | kg | 0.00E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| EEE | MJ, net calorific value | 0.00E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| EET | MJ, net calorific value | 0.00E+0 | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND | ND |
| Acronyms | CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy. | | | | | | | | | | | | | | | |

ABBREVIATIONS

Not applicable

REFERENCES

- a) General Programme Instructions of International EPD System. Version. 5.0.1
- b) PCR 2019:14.. Version 2.0.1 N Product Category rules | Construction products | The International EPD System ame
- c) ISO 14040:2006 Environmental management - Life Cycle Assessment - Principles and framework
- d) ISO 14044:2006 Environmental management - Life Cycle Assessment - Requirements and guidelines
- e) EN 16908:2017+A1:2022 Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804
- f) ISO 14025:2006 Environmental labels and declarations - Type III environmental declarations - Principles and procedures
- g) EN 197-1:2012 - Part 1: Composition, specifications and conformity criteria for common cements
- h) Industry EPD Tool for Cement and Concrete (<https://concrete-epd-tool.org/>)
- i) User Guide (v5.2, International version, 24 June 2025)
- j) LCA Model (v5.2, International version, 17 July 2025)
- k) LCA Database (v5.2, 24 June 2025)

VERSION HISTORY

Version 1, 2026-06-24

Original version of the EPD

